


CONTROLS



CLEVER PRO (optional) ADVANCED PRO (standard)


4 PINS CONNECTOR RJ11
Are used for the connection to the control and also to the slaves air curtains connected

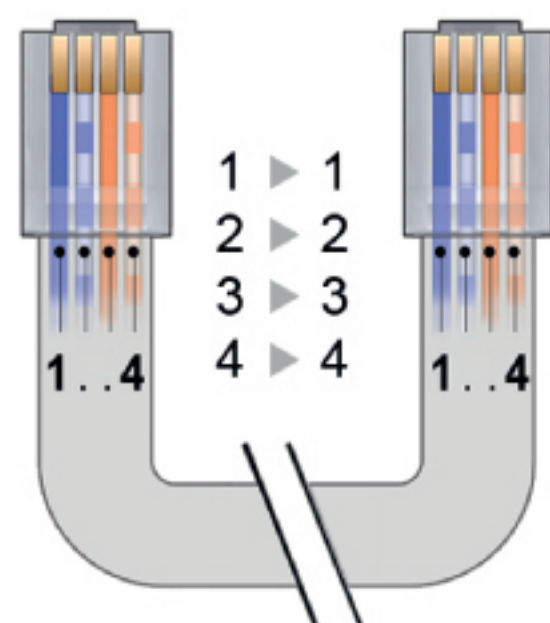



OPTIONAL WATER HEATING VALVES:

Addon modulating valve

Addon ON/OFF valve (standard)

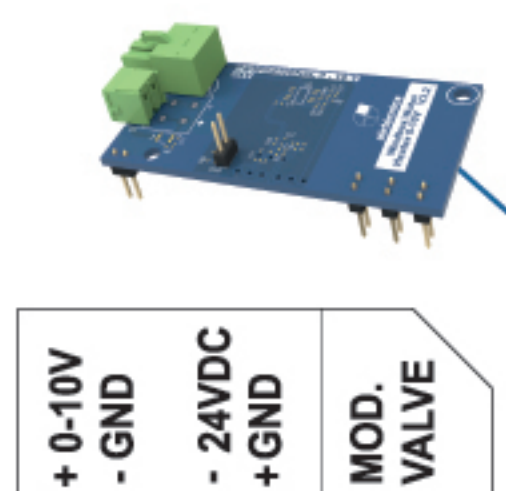

The control cables and air curtain cables can be connected to either COM1 or COM2.

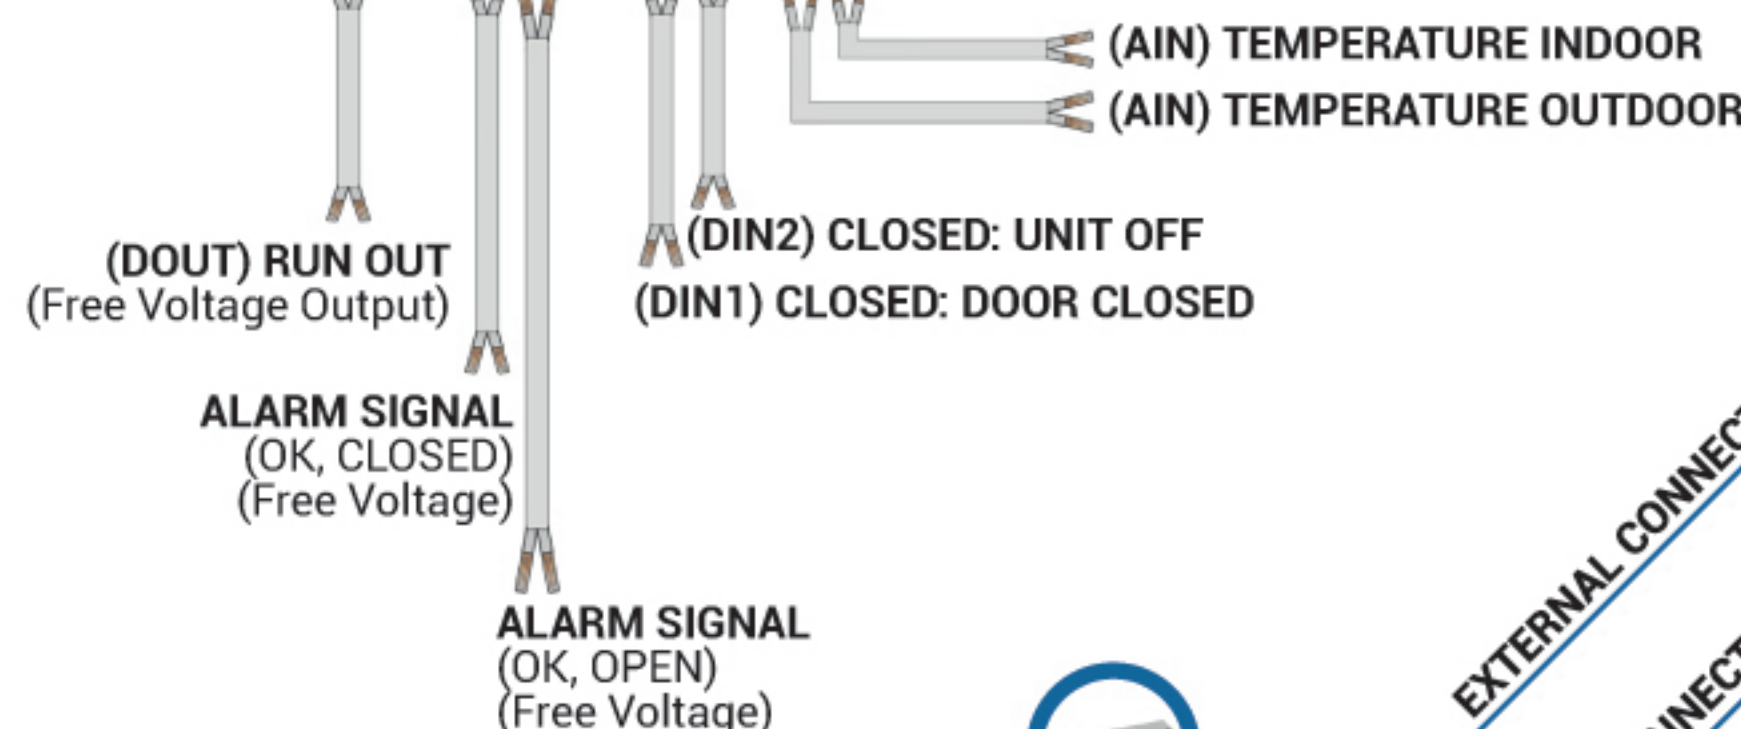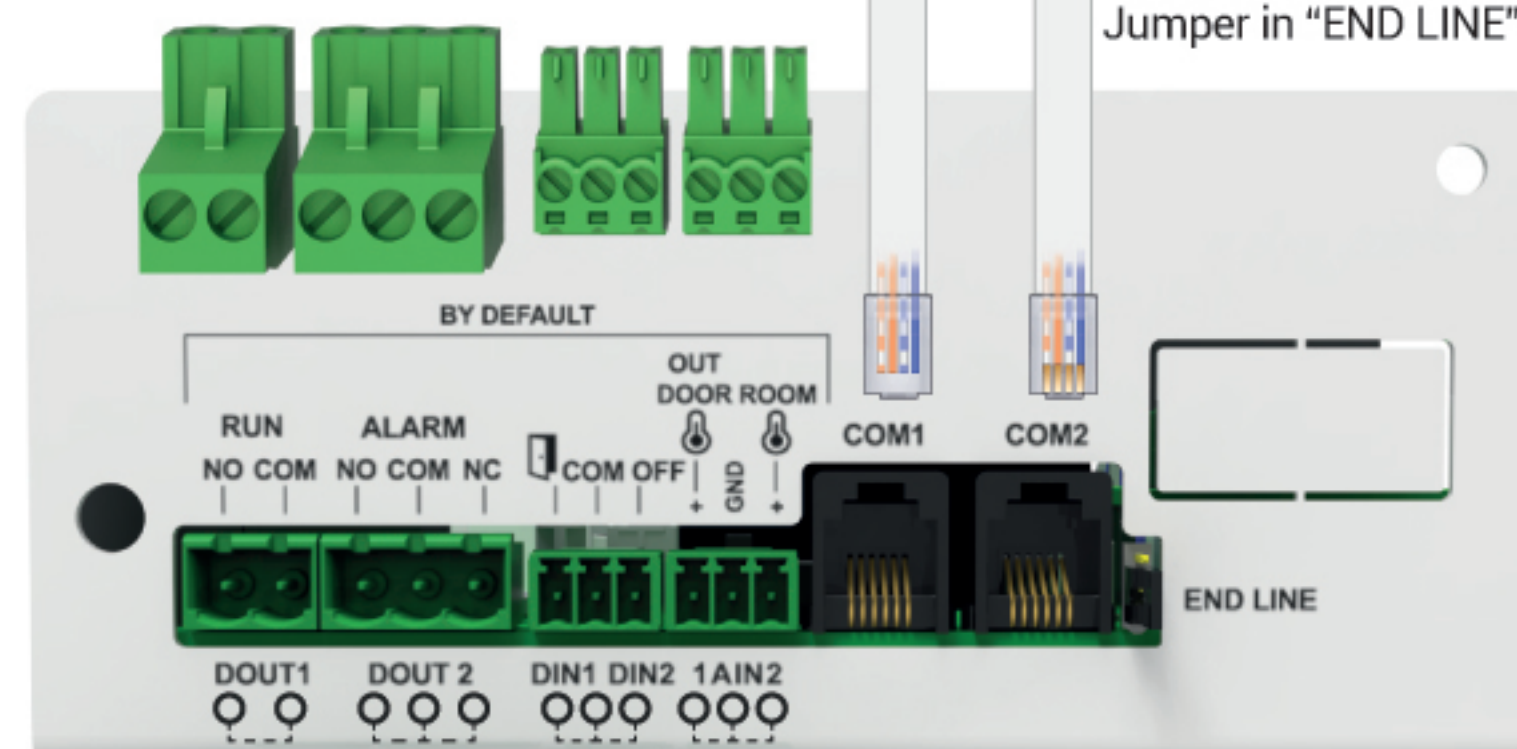

AIR CURTAIN 2 (SLAVE)


When multiple air curtains are connected to an only control, the last one must incorporate a Jumper in "END LINE" pins.



1~PHASE

POWER SUPPLY

WATER or UNHEATED

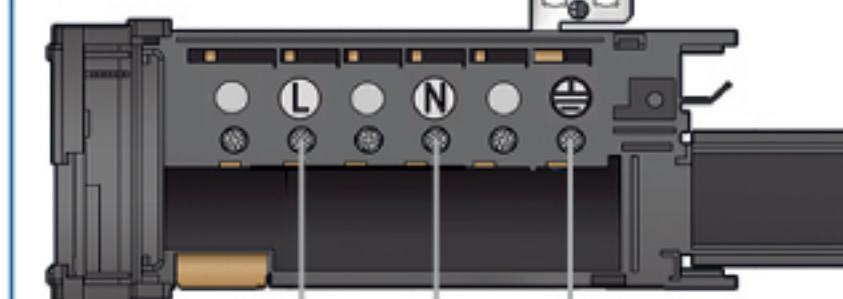


230V~1(50Hz)

3~PHASE

ELECTRICAL HEATING UP TO 18KW

(MG models)

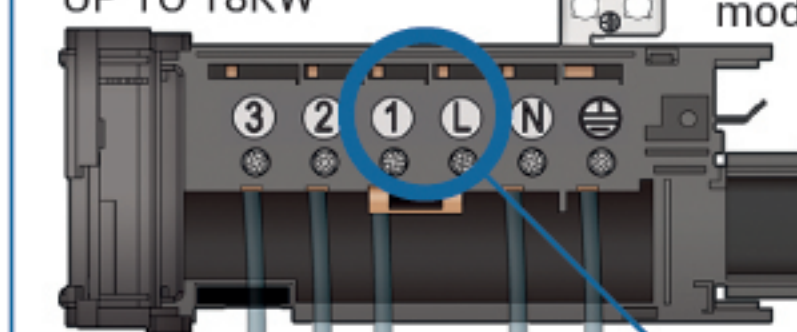

400V~3(50Hz)

Bonding Jumper 1-L



ELECTRICAL HEATING



Models G of 22,5 kW or more (All models SB-BB)

(*)

(*) Greater than 30 kW (included), the air curtains have 2 power sources.

400V~3 (50Hz)

AIR CURTAIN 1 (MASTER)

EXTERNAL CONNECTION BOX
INTERNAL CONNECTION